



GRECA G5 10mm

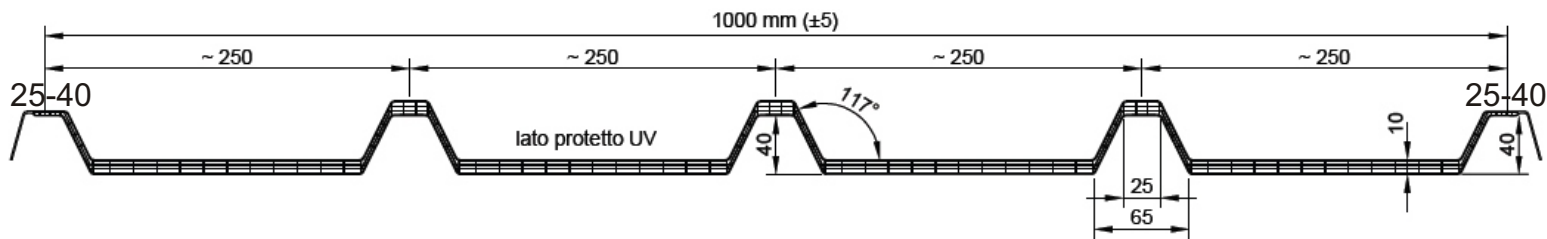

Nota:
aripile laterale uzuale pe stoc sunt de 25mm stanga si 25mm, dar se pot produce la comanda intre 25-40mm

TECHNICAL DATA		LOAD TABLE	
Panel thickness	10 mm		
Number of hooks	5		
Hook distance	~250 mm		
Panel modular width	~1000 ± 5 mm		
Standard length	10000 mm		
Length on request	max. 13500 mm		
Dimension side hooks	25-35		
Alternative dimension side hooks	from 20 mm to 40 mm		
Curved panel	R = ~3500 mm - ~6000 mm		
Colour	transparent satinized - opaline		
Weight	~2,30 Kg/m ²		
U.V. protection	on external side in coextrusion		
End edges	heat sealed ends		
Fire class, EN 13501-1	B s1 d0		
Light transmittance	transparent ~68% - opaline ~60%		
Thermal transmittance [U]	2,57 W/m ² K		
Thermal expansion	0,065 mm/m °K		
Temperature range	-40 / +120 °C		

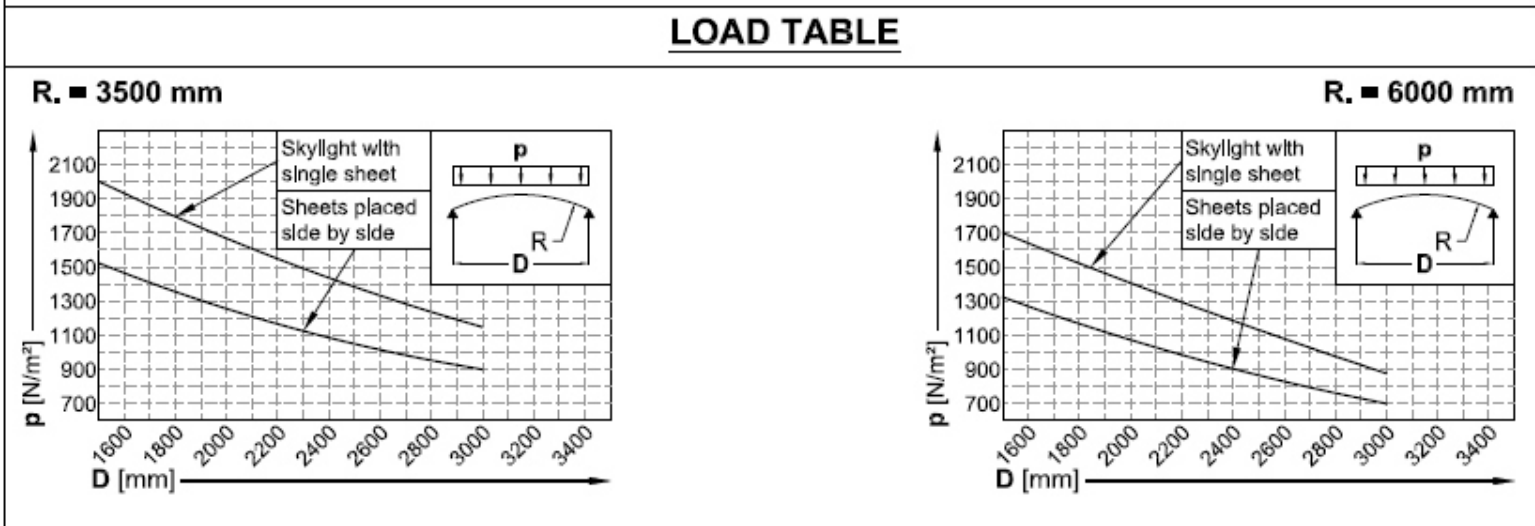

SPECIFICATION TEXT

Inclined transparent light strip / rooflight / curved zenital rooflight with radius = 3500 mm / 6000 mm made from cellular multi-wall profiled sheets in UV protected polycarbonate (3 hollow chambers) with thermosealed ends, modular width 1000 mm, hook distance 250 mm, total net height 40 mm, thickness 10 mm, thermal insulation U = 2,57 W/m²K, colour transparent / opaline; PE inlays, gaskets and what else is necessary for the tightness at the borders